

BM

Dual
glass
series

210P-110DG

Efficient bifacial PERC monocrystalline silicon half cells PV module



550 W

Maximum output power




21.05%

Maximum efficiency



0~+5W

Power tolerance

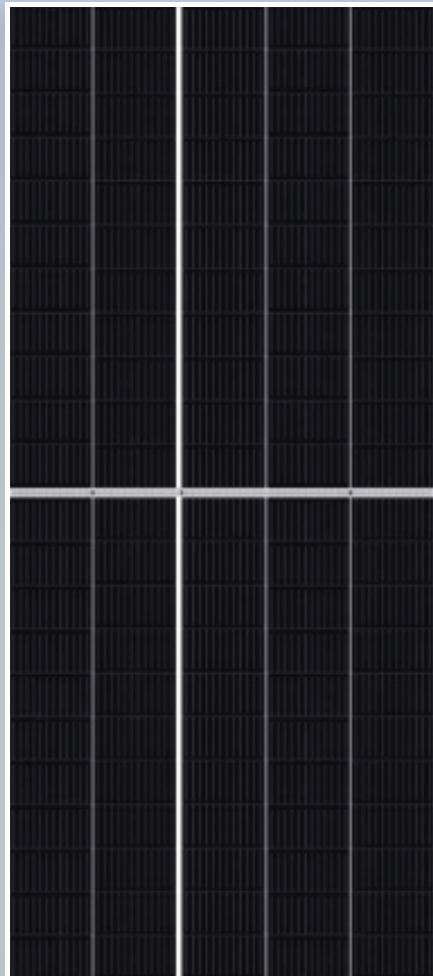

Boamax's long-term stable quality is trustworthy

- Automatic production line and leading photovoltaic technology
- EL testing is performed respectively before and after lamination, ensuring the reliability of the modules.
- Passed various long-term reliability tests
- Strictly execute international standard management systems, including ISO 9001, ISO 14001, and ISO 45001.

 Multi-Busbar welding design, optimizes optical and electrical properties of modules

 Fire-proof grade A, ensure more safety


 Optimized packaging materials and strict process scheme ensure the PID resistance of modules

 POE sealing, enables effective resistance to various harsh environments

 The cell slicing technology .Significantly reduces the string current, reduces the loss of internal conversion efficiency, and effectively reduces BOS and LCOE

 Advanced non-destructive slicing technology, with small cell damage and reduce the risk of cracking

Industry leading linear warranty

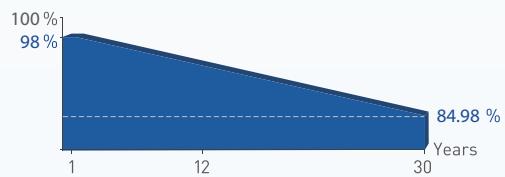

12 year Product Warranty 30 year Power warranty

Excellent warranty, with a commitment to a 30-year power warranty and a linear power attenuation of 0.45%

Electrical Data (STC)

Peak Power	Pmax[W]	530	535	540	545	550
Maximum Power Voltage	Vmp[V]	31.16	31.36	31.56	31.76	31.96
Maximum Power Current	Imp[A]	17.02	17.07	17.12	17.17	17.22
Open Circuit Voltage	Voc[V]	37.44	37.66	37.88	38.10	38.32
Short Circuit Current	Isc[A]	18.02	18.07	18.12	18.17	18.22
Module Efficiency	[%]	20.28	20.48	20.67	20.86	21.05
Power Tolerance	[W]			0~+5		

*STC : atmospheric mass AM1.5, irradiance 1000 W/m², cell temperature 25 °C

Electrical Data (NMOT)

Peak Power	Pmax [W]	400	404	407	411	415
Maximum Power Voltage	Vmp [V]	29.43	29.56	29.68	29.81	29.93
Maximum Power Current	Imp [A]	13.59	13.66	13.72	13.79	13.87
Open Circuit Voltage	Voc[V]	35.93	36.08	36.23	36.38	36.52
Short Circuit Current	Isc [A]	14.57	14.61	14.65	14.69	14.73

*NMOT : irradiance 800 W/m² ambient temperature 20 °C, wind speed 1 m/s

Electrical Data

Bifacial power gain (reference to 10 % irradiance ratio)

Peak Power	Pmax[W]	585	588	592	595	599
Maximum Power Voltage	Vmp [V]	31.68	31.78	31.89	32.00	32.11
Maximum Power Current	Imp [A]	18.47	18.48	18.55	18.59	18.64
Open Circuit Voltage	Voc[V]	38.11	38.28	38.44	38.61	38.78
Short Circuit Current	Isc [A]	19.25	19.32	19.49	19.55	19.61
Module Efficiency	[%]	22.39	22.48	22.64	22.77	22.91
Irradiation Ratio	sc[A]			10%		

Structural Parameters

Number of Cells	110 pieces (5*22)
Module Dimension	2384*1096*35mm
Weight	32.5kg
Front Glass	2.0mm, High transmission coated glass
Back Glass	2.0mm, Semi-tempered glass
Frame	Anodized Aluminum alloy
Junction Box	IP68 rated
Cable	4mm ² , 300mm in length, length can be customized
Number of Diodes	3
Wind Pressure/Snow Pressure	2400 Pa/5400 Pa
Connector	MC4

Temperature Characteristic

Nominal operating cell temperature	45±2°C
Temperature coefficient (Isc)	+0.05%/°C
Temperature coefficient (Voc)	-0.28%/°C
Temperature coefficient (Pmax)	-0.34%/°C

Packing Method

Modules per box	31 pieces
Modules per 40' container	558 pieces


Limit Parameters

Operating temperature	-40~+85°C
Maximum system voltage	1500V DC
Maximum rated current of fuse	30A


Optional Configuration

Connector	<input type="checkbox"/> Original PV
-----------	--------------------------------------

Module Dimension

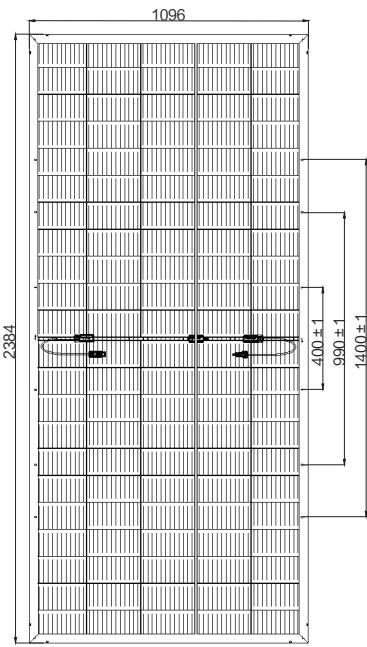


Back View



Curve Chart

I-V curves at different temperatures (550W)

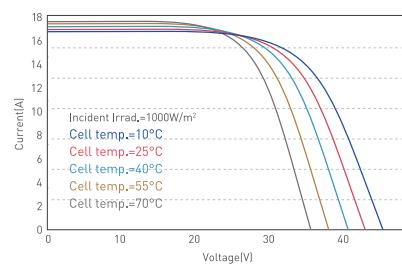

I-V curves/P-V curves at different irradiance (550W)

