

Bifacial Dual Glass Monocrystalline Module

# BM 182H-108DG

Dual glass series

Efficient bifacial HJT monocrystalline silicon half cells PV module



435 W

Maximum output power




22.28%

Maximum efficiency



0~+5 W

Power tolerance

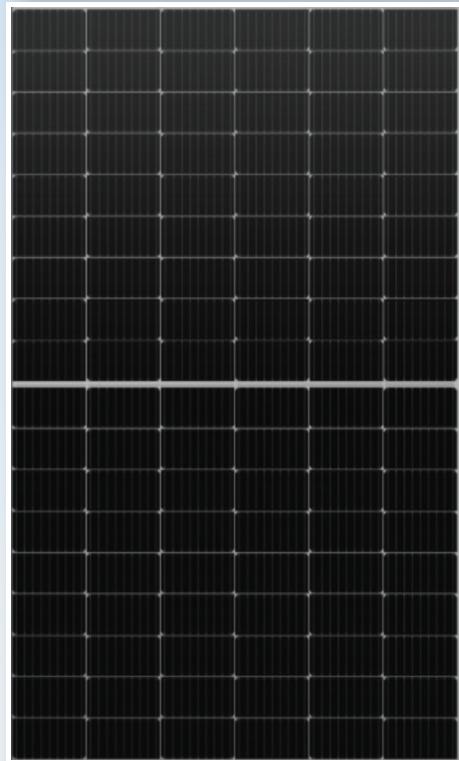

## Boamax's long-term stable quality is trustworthy

- Automatic production line and leading photovoltaic technology
- EL testing is performed respectively before and after lamination, ensuring the reliability of the modules.
- Passed various long-term reliability tests
- Strictly execute international standard management systems, including ISO 9001, ISO 14001, and ISO 45001.



Multi-Busbar welding design, optimizes optical and electrical properties of modules



POE sealing, enables effective resistance to various harsh environments



Fire-proof grade A, ensure more safety



The cell slicing technology .Significantly reduces the string current, reduces the loss of internal conversion efficiency, and effectively reduces BOS and LCOE




Optimized packaging materials and strict process scheme ensure the PID resistance of modules



Advanced non-destructive slicing technology, with small cell damage and reduce the risk of cracking

## Industry leading linear warranty

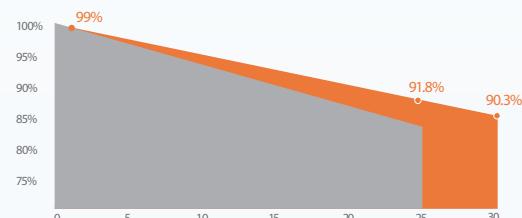

15 year Product Warranty 30 year Power warranty

The attenuation in the first year is 1%, and from the second year onwards, the annual attenuation does not exceed 0.30%.

## Electrical Data (STC)

Peak Power	Pmax[W]	410	415	420	425	430	435
Maximum Power Voltage	Vmp[V]	31.13	31.32	31.51	31.70	31.88	32.06
Maximum Power Current	Imp[A]	13.17	13.25	13.33	13.41	13.49	13.57
Open Circuit Voltage	Voc[V]	37.73	37.92	38.11	38.30	38.49	38.68
Short Circuit Current	Isc[A]	13.91	13.99	14.07	14.15	14.23	14.31
Module Efficiency	[%]	21.00	21.25	21.51	21.76	22.02	22.28
Power Tolerance	[W]					0~+5	

\*STC : atmospheric mass AM1.5, irradiance 1000 W/m<sup>2</sup>, cell temperature 25 °C

## Electrical Data (NMOT)

Peak Power	Pmax[W]	310	313	316	319	322	324
Maximum Power Voltage	Vmp[V]	29.34	29.44	29.54	29.64	29.74	29.84
Maximum Power Current	Imp[A]	10.57	10.63	10.69	10.75	10.82	10.86
Open-Circuit Voltage	Voc[V]	35.76	35.94	36.12	36.30	36.48	36.66
Short Circuit Current	Isc[A]	11.21	11.26	11.31	11.36	11.41	11.46

\*NMOT : irradiance 800 W/m<sup>2</sup> ambient temperature 20 °C, wind speed 1 m/s

## Electrical Data

## Bifacial power gain (reference to 10 % irradiance ratio)

Peak Power	Pmax[W]	455	460	465	470	475	480
Maximum Power Voltage	Vmp[V]	32.45	32.71	32.97	33.23	33.49	33.75
Maximum Power Current	Imp[A]	14.02	14.06	14.10	14.14	14.18	14.22
Open-Circuit Voltage	Voc[V]	38.76	39.02	39.28	39.54	39.80	40.06
Short Circuit Current	Isc[A]	14.53	14.57	14.61	14.65	14.69	14.73
Module Efficiency	[%]	23.30	23.56	23.81	24.07	24.32	24.58
Irradiation Ratio	sc[A]				10%		

## Structural Parameters

Number of Cells	108 pieces (6*18)
Module Dimension	1722*1134*35mm
Weight	26.0kg
Front Glass	2.0mm, High transmission coated glass
Back Glass	2.0mm, Semi-tempered glass
Frame	Anodized Aluminum alloy
Junction Box	IP68 rated
Cable	4mm <sup>2</sup> , 300mm in length, length can be customized
Number of Diodes	3
Wind Pressure/Snow Pressure	2400 Pa/5400 Pa
Connector	MC4

## Temperature characteristic

Nominal operating cell temperature	45±2°C
Temperature coefficient (Isc)	+0.05%/°C
Temperature coefficient (Voc)	-0.28%/°C
Temperature coefficient (Pmax)	-0.34%/°C

## Packing Method

Modules per box	36 pieces
Modules per 40' container	806 pieces


## Limit Parameters

Operating temperature	-40~+85°C
Maximum system voltage	1500V DC
Maximum rated current of fuse	30A


## Optional Configuration

Connector	Original PV
-----------	-------------

## Module Dimension

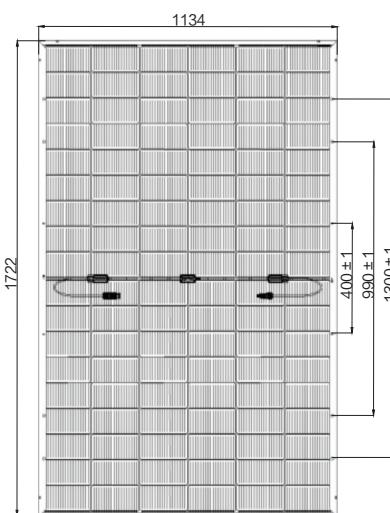


## Back View



## Curve Chart

I-V curves at different temperatures (435W)

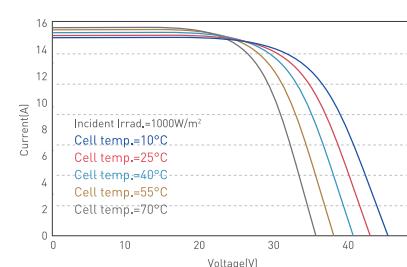

I-V curves/P-V curves at different irradiance (435W)

